

KINGS A D V E N T U R E



Jump Starter
USER MANUAL

PLEASE READ AND UNDERSTAND THIS MANUAL COMPLETELY
BEFORE USE.

SAFETY INFORMATION

Always follow safety precautions when using electrical equipment.
Please keep this instruction manual with the jump starter at all times.


Ensure the jump starter and all accessories are in good working order before each use.

Once vehicle is started, remove the jump starter as soon as possible to prevent possible damage to the unit.


- DO NOT connect the two clamps together.
- DO NOT modify or disassemble the jump starter.
- DO NOT operate near water or in damp/ wet conditions.
- DO NOT operate near flames or flammable objects.
- DO NOT expose the unit to extreme heat.

KEEP PRODUCT AWAY from children.

OVERVIEW



Jump Start Socket

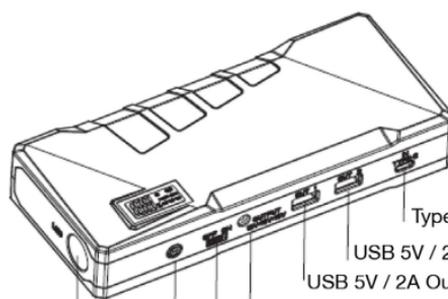

Type-C 9V / 2A Input

USB 5V / 2A Output


USB 5V / 2A Output

12V / 16V / 19V Output

On-Off Power Switch

Power Button

LED Flash Light

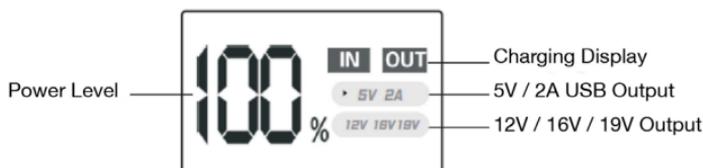

Charging Display

5V / 2A USB Output


12V / 16V / 19V Output

OPERATION

CHARGING YOUR JUMP STARTER

You can charge your jump starter by:

1. Using the supplied 240V AC charger OR
2. Using the supplied 12V Cigarette plug lead.

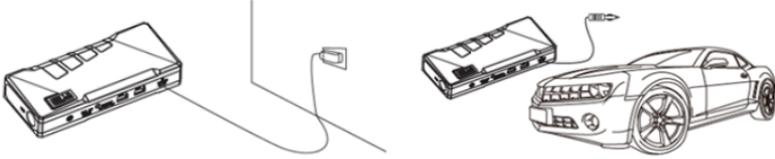

STARTING YOUR VEHICLE

Ensure the jump starter's power level is not lower than 50% charged. If it is below 50% you may not be able to jump start the vehicle.

1. Slide the power switch to the 'on' position and press the round power button.
2. Connect the jumper leads to your jumper starter, check the blue plug tightly connects with the jump starter.
3. Connect the RED (positive) clamp to the vehicle's positive (+) terminal and connect the BLACK (negative) clamp to the vehicle's negative (-) terminal.
4. Start the vehicle.
5. Once the vehicle has started, disconnect the jump starter from the battery as soon as possible.
6. Turn the jump starter's power switch to the 'off' position.

CHARGING MOBILE PHONES


Note: Ensure the on/ off switch is in the 'on' position.

1. Use either the provided or your own USB charging cable.
2. Connect the cable to either 'OUT 1' or 'OUT 2', connect the other end to your device. If you are using the provided USD charging lead ensure you select the correct connection for your device.

DO NOT charge more than 1 device at a time with the provided USB break out charging cable.

DO USE both USB outlets at the same time if required.

3. Press the power button on the jump starter unit to begin charging your device.

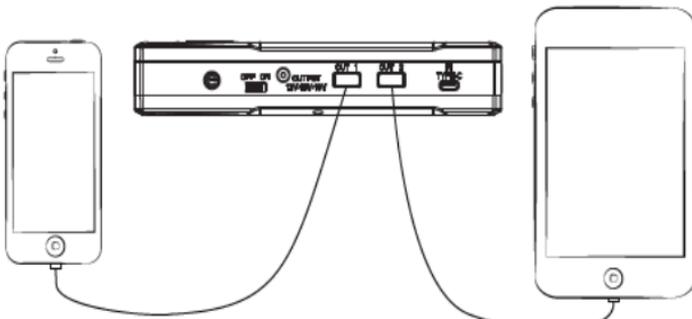

CHARGING LAPTOPS

Note: Ensure the on/ off switch is in the 'on' position.

1. Select the suitable charging plug and connect it to the short laptop charging cable provided.
2. Press the round power button to select the correct voltage suitable for your laptop. This will either be 12/16/19 volts. Voltage is shown on the bottom right corner of the LCD screen.
3. Once the correct voltage is selected, connect the laptop charging cable to the jump starter and then to your laptop.
4. If you need to reselect the voltage, turn the unit off and then back on.

NOTE: Warranty does not cover any loss associated with improper use. Please ensure you check the rated voltage of your device before charging from the 12/16/19V port.

USING THE LED TORCH

Note: Ensure the on/ off switch is in the 'on' position.

1. Press and hold the round power button for 3 seconds. The LED torch will then turn on.
2. Press the round button again to activate the strobe function.
3. Press the round button again to activate the SOS function.

SMART CLAMPS

The Jump Starter features a smart clamp system to provide Low Voltage, Reverse Polarity, Short Circuit, Reverse Charge and Automatic Power Shut off Protection.



FUNCTION	INDICATION	DETAILS
Ready for Jump Starting	Solid Blue Light	The smart clamps are correctly connected to the vehicle terminals are ready for jump starting.
Low Voltage Protection	Flashing RED Light	The jump starter's voltage reaches below 10.5V, the smart clamps will be in a Low Voltage Protection mode. Note: The RED light will keep flashing, the buzzer will sound, the outputs turns off automatically.
Reverse Polarity Protection	Flashing RED Light	The clamps are reverse connected to the vehicle battery, the smart clamps will be in a Reverse Polarity Protection mode.
Short Circuit Protection	Flashing RED Light	The two clamps are connected, the smart clamps will be in a Short Circuit Protection mode.
Reverse Charging Protection	Flashing RED Light	The car has started, if there is any reverse current, the smart clamps will turn off output automatically.
Automatic Power Shut Off	Flashing RED Light	After jump starting, if no further operation occurs the smart clamps will turn off output automatically.

TROUBLESHOOTING

ISSUE	CAUSE	SOLUTION
No response when pressing the power button	1. Low voltage protection is preventing the device from turning on 2. The power switch is off	1. Charge the device 2. Ensure the power switch is turned to the 'on' position

SPECIFICATIONS

Dimensions:	190.5 x 82.5 x 34mm
Weight:	580g
Internal Battery:	Lithium Ion
Battery Capacity:	18,000mAh / 66.6Wh
Starting Current:	400A
Peak Current:	800A
USB Output:	5V / 2A
Input:	Type - C Plug 9V / 2A
Safe Operating Temperature:	0°C ~ 40°C

12 MONTH LIMITED WARRANTY

WARRANTY PERIOD:

Full 12 month warranty from date of purchase against all manufacturing defects.

WHAT DOES THE WARRANTY COVER?

Under normal usage conditions, this warranty covers:

- a. Any defect in design or manufacture which results in the product failing to perform substantially as described in authorised advertising or literature.
- b. We will either repair or replace the product at our discretion providing that the fault is found to have been caused by a design or manufacturing defect and not misuse or tampering.

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure. The benefits provided to you as the consumer by this warranty are in addition to other rights and remedies available to you under the law.

THE WARRANTY DOES NOT COVER:

- a. Any damage resulting from improper use
 - b. Faulty installation or modification made during installation
 - c. The cost of removing and reinstalling the product
 - d. Travel and /or other expenses due to customer's remote location
 - e. Transport charges and damage in transit. It is your responsibility to deliver and pick up your product, including any costs associated with the postage of your repair or replacement product. If you do freight your product we recommend that you insure against loss or damage.
 - f. Any loss directly or indirectly associated with the product failing to operate.
 - g. Damage caused by mould, insects, animals, misuse, incorrect operation, adverse weather, accidents and fair wear and tear.
-

TO MAKE A CLAIM, PLEASE ENSURE YOU RETAIN YOUR SALES RECEIPT OF PURCHASE

1800 88 39 64



OUTDOOR SUPACENTRE PTY LTD
2 Stanley St Silverwater NSW, 2128
PHONE: 1800 88 39 64
www.4wdsupacentre.com.au