



# ***KINGS***

A D V E N T U R E

## ***NEOPRENE SEAT COVERS***



### **IMPORTANT INFORMATION:**

- Carefully read all instructions before installing.
- Suitable for bucket style front seats.
- Incorrect installation may affect side seat airbags resulting in injury or death.

**IMPORTANT:** If your vehicle does not contain Side Seat Airbags, please fit the seat cover marked 'Driver's Side' on the passenger seat and vice versa. This allows the driver seat to be protected from the door side.





## HOW TO LOOK AFTER YOUR SEAT COVERS

Most small stains and light marks are easily washed off with a damp cloth or towel.

These seat covers are machine washable – but they must be set on cold wash gentle cycle with standard washing powder.

To clean after trips simply hose down and hang on the line out of the sun

# SEAT COVERS

Image 1.



Image 2.



Image 3



## FITTING INSTRUCTIONS

- ▶ Remove the headrests from both front seats.
- ▶ Make sure you know which side of the seat cover is the exterior – the care instructions label should not be visible.
- ▶ Lay the seat cover down on the bottom part of the seat and align.
- ▶ Carefully thread the neoprene rod flap between your backrest and base. *(Image 1)*
- ▶ With two hands, roll the rest of your seat cover over the top of the chair, and adjust to fit the contours of your seat. *(Image 2)*
- ▶ Pull it tight and using your fingers tuck as much of the seat cover between all trimming as possible. *(Image 3)*
- ▶ Secure the seat cover by feeding the hook and loop ties around the rear of the seat. *(Image 4a and 4b)*



Image 4a



Image 4b



## FITTING YOUR HEADREST

We make our seat covers to fit every kind of four wheel drive you can think of! Due to the large degree of choice, it makes it impossible to manufacture perfect holes for different headrest prongs.

To adjust your seat covers for your headrests, you'll need:

**A 1" inch hole punch OR a sharp pair of scissors**

# HEADREST HOLES



Image 5



Image 6

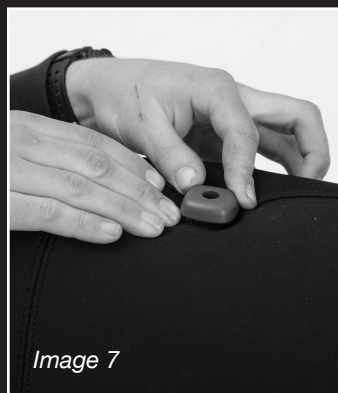


Image 7

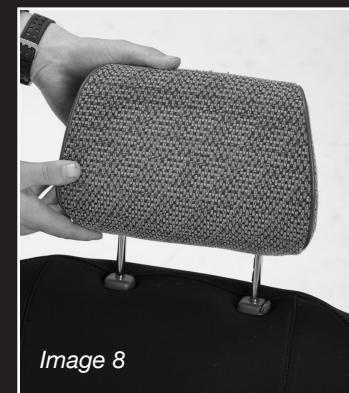


Image 8

## STEPS:

- ▶ Remove plastic trimming over headrest holes
- ▶ Mark the location of headrest prongs and remove the seat covers. If using a hole press, place seat cover on a flat surface and punch through (*Image 4*)
- ▶ If using scissors, pinch the cover where the headrests are marked and snip through the neoprene – it should be no bigger than a 10 cent piece (*Image 5*)
- ▶ Refit the seat covers and tuck any excess material into headrest prong holes
- ▶ Refit plastic trimming (*Image 6*)
- ▶ Place headrest back into place (*Image 7*)







# **KINGS**

A D V E N T U R E

## **NEOPRENE SEAT COVERS**

### **IMPORTANT SAFETY INFO:**

If your vehicle has side seat airbags, it is critical not to cover the airbag seam. If your neoprene seat cover is over the seam, please re-adjust. Failure to give airbag seam enough clearance will hamper operation, possibly resulting in injury or death.

### **WARRANTY**

#### **12 MONTH WARRANTY**

12 month limited warranty applies to original purchaser under the following conditions. 4WD Supacentre will warrant against manufacturing faults and defects for a period of 12 months from original purchased date. This warranty does not include damage caused by mould, insects, animals, children, misuse, incorrect installation, weather, accidents, burns, abuse, wear and tear. To make a claim, please ensure you retain your sales receipt of purchase.

4WD Supacentre reserves the right to vary the product specifications and features.

“Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.”

### **4WD & OUTDOOR SUPACENTRE PTY LTD**

2 Stanley St Silverwater NSW, 2128

PHONE: 02 8719 3536